

Maintenance Kits

Models

- G006482-0
- G006483-0
- G006484-0
- G006485-0
- G006003-0
- G006004-0
- G006806-0
- G006829-0
- G007216-0




DESCRIPTION

Scheduled maintenance is a necessity for all standby generators. The Air-Cooled Scheduled Maintenance Kits include all the components necessary to perform complete routine maintenance on Generac air-cooled generators*. Maintenance is recommended at every 200 hours, or 2 years, whichever comes first. If running in a dusty or dirty environment, more frequent maintenance may be required. Maintenance intervals may differ per model. See the generator owner's manual for more information.

*Oil not included. Oil must be purchased separately based upon the recommendations listed below.

OIL RECOMMENDATIONS

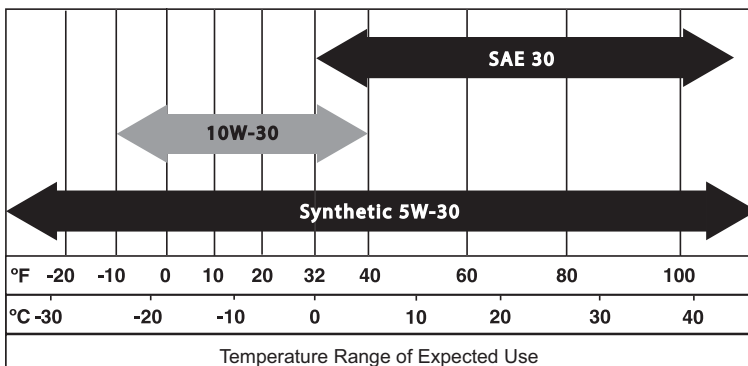

- SAE 30 above 32 °F (0 °C)
- 10W-30 between 40 °F and -10 °F (4 °C and -23 °C)
- Synthetic 5W-30 for all temperature ranges.

Maintenance Kits

Kit Compatibility and Contents

CONTENTS

Scheduled maintenance kits include an air filter(s), oil filter, spark plug(s), oil funnel, chamois, and reminder stickers. Contents of scheduled maintenance kits may vary. The maintenance kits listed are for models manufactured between 2013 and present. For maintenance items for older models, please contact a dealer.

Kit Model	Kit UPC	Unit Size	Compatible Unit Models
G006004-0	696471060041	6 kW	5818
G006806-0	696471073508	7 kW PowerPact®	6561
			6518
			6519
		7.5 kW PowerPact®	6998
		5.6 kVA PowerPact®	6520
G006003-0	696471060034	7 kW CorePower™	5837
			5888
G006482-0	696471064827	8 kW	6251
			6237
			6245
		9 kW	7029
			7030
		10 kW	7171
		7172	
G006483-0	696471064834	11 kW	6437, 7032
			6438, 7033
			6439
			6440
			6441
			6720, 7031
		8 kVA	6269, 7044, 7144
			7047
G006484-0	696471064841	13 kW	6254
			6255
		14 kW	6240
			6241
			6247
		15 kW	6281
		16 kW	6256
			6257
			6721
		17 kW	6242
			6243
			6248
6249			
6270			
10 kVA	6858		
	6271		
13 kVA	6859		

Kit Model	Kit UPC	Unit Size	Compatible Unit Models
G006829-0	696471068290	20 kW Synergy™	6055, 7040
		15 kW EcoGen™	6098, 7041
G006485-0	696471064858	10 kVA	6103, 7034
			7048
			7045, 7145
			7049
		13 kVA	7046, 7146
			7078
		20 kVA	7189
			7219
		15 kW EcoGen™	7163
			7035
		16 kW	7036
			7037
			7141
			6244
20 kW	6250		
	6258		
	6730, 7038		
	6729, 7039		
	7077		
	6552, 7042		
22 kW	6551, 7043		
	7142		
	7218		
24 kW	7210		
	7209		
G007216-0	696471078800	13 kW	7173
			7174
			7175
			7176
		16 kW	7177
			7178